




GUAINASIL-XP

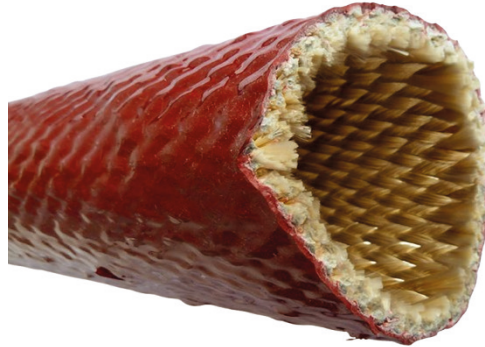

STRUCTURE

Red iron oxide silicone coated mineral braided fiber sleeve, silicone thickness 4.0mm

CHARACTERISTICS

Good resistance to flames, good resistance to metals or melted glasse, good resistance against steam contact, good mechanical resistance, good resistance against UV, good resistance to welding sparks, asbestos free, water impermeability, very high flexibility at low temperature, flammability: self-extinguishing

STANDARD REFERENCES

RoHS 2002/95/CE
F1 and I2 according to standard NF F16-101/16-102 and STM S-001
NF EN 60695-2-10 (05-2001)
NF EN 60695-2-11 (07-2001)
NF EN 60684-1 (10-2003)
NF EN 60684-2 (01-1998) modified from NF EN 60684-2/A1 (12-2003)
NF EN 60684-2/A2 (05-2006)
NF EN (Cei) 60684-3 pages 400 to 402 (02-2003)

TEMPERATURE RANGE





-60 °C/+250 °C peaks up to 1000 °C.
Peaks: Ø 30 min up to +800 °C, Ø 15 min up to +1100 °C, Ø 1 min up to +1500 °C

COLOUR

Red iron oxide

PACKAGING

Hanks or coils

 Article ID	 Internal diameter (mm)	 Internal diameter tolerance (mm)	 Wall thickness (mm)
CVSR040THT008	8,0	0,50	4,0
CVSR040THT010	10,0	0,50	4,0
CVSR040THT013	13,0	0,50	4,0
CVSR040THT016	16,0	1,00	4,0
CVSR040THT019	19,0	1,00	4,0

Tubi Flessibili S.r.l. - Tel: +39 0131238971 - Email: info@tubiflessibili.net



According to ISO 1307
Above technical data are referring to applications at a room temperature (+20°C)

Copyright © TUBI FLESSIBILI S.r.l. - All rights reserved. The texts and images are property of Tubi Flessibili S.r.l.
Even partial reproduction of the catalog is prohibited.





TUBIFLESSIBILI

			
Article ID	Internal diameter (mm)	Internal diameter tolerance (mm)	Wall thickness (mm)
CVSR040THT022	22.0	1.00	4.0
CVSR040THT025	25.0	1.00	4.0
CVSR040THT032	32.0	1.00	4.0
CVSR040THT038	38.0	1.00	4.0
CVSR040THT045	45.0	1.50	4.0
CVSR040THT051	51.0	1.50	4.0
CVSR040THT057	57.0	1.50	4.0
CVSR040THT060	60.0	1.50	4.0
CVSR040THT064	64.0	1.50	4.0
CVSR040THT070	70.0	2.00	4.0
CVSR040THT076	76.0	2.00	4.0
CVSR040THT080	80.0	2.00	4.0
CVSR040THT089	89.0	2.00	4.0
CVSR040THT102	102.0	2.00	4.0

Tubi Flessibili S.r.l. - Tel: +39 0131238971 - Email: info@tubiflessibili.net

According to ISO 1307

Above technical data are referring to applications at a room temperature (+20°C)

Copyright © TUBI FLESSIBILI S.r.l. - All rights reserved. The texts and images are property of Tubi Flessibili S.r.l.
Even partial reproduction of the catalog is prohibited.

