

ONDASIL1 - MARINE



STRUCTURE

Single hump marine hose, made of VMQ (Vinyl Methyl Quality) silicone, with polyester reinforcement.

APPLICATION

Wet exhaust gasses systems for marine applications

STANDARD REFERENCES


SAE J 2006 R3, Lloyds Register certified



TEMPERATURE RANGE

-60°C up to +180°C, peaks to + 200°C


COLOUR

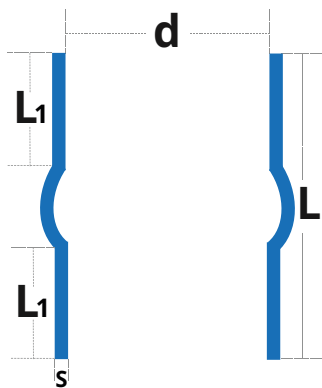




Standard external blue and red inside, other on request

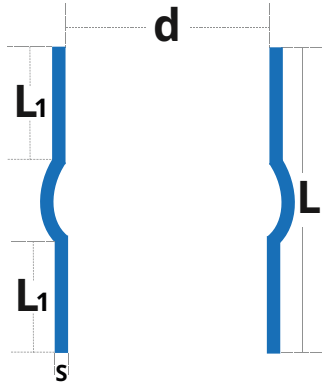

 d (mm)	 L (mm)	 L1 (mm)	 S (mm)	 Working pressure (bar)
34	120	45	5,5	6.0
38	120	45	5,5	5.6
42	120	45	6	5.2
48	130	50	5,5	4.7
51	152	57	5,5	4.6
54	150	57	5,5	4.1
60	160	60	6,5	3.8
63	160	60	6,5	3.8
76	180	67	5,5	3.1
89	200	70	5,5	2.8
102	200	46	6	2.3
108	200	70	6,5	2.3
114	200	70	6,5	2.1
127	200	75	6,5	2.0
133	200	75	6,5	2.0





 d (mm)	 L (mm)	 L_1 (mm)	 S (mm)	 Pressione di esercizio (bar)
140	200	75	6,5	1,8
152	200	75	6,5	1,4
168	200	80	7	1,2
205	250	100	7,5	1,2
220	300	125	8	0,9
254	300	125	8	0,9
270	300	125	8	0,9
305	300	125	8	0,9
325	300	125	8	0,9
355	300	125	8	0,9
406	400	175	8	0,9
508	305	127	8	0,9

