



TUBIFLESSIBILI

ONDASIL2 - MARINE



STRUCTURE

Double hump marine hose, made of VMQ (Vinyl Methyl Quality) silicone, with polyester reinforcement.

APPLICATION

Wet exhaust gasses systems for marine applications

STANDARD REFERENCES

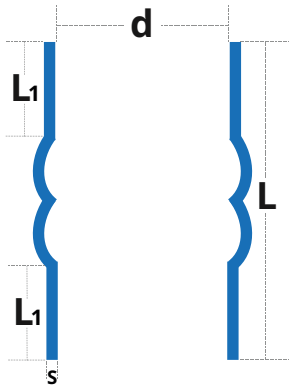
SAE J 2006 R3, Lloyds Register certified






TEMPERATURE RANGE

-60 °C up to +180 °C, peaks to + 200 °C

COLOUR

Standard external blue and red inside, other on request



 d (mm)	 L (mm)	 L1 (mm)	 S (mm)	 Working pressure (bar)
152	355	125	7,5	1,4
205	355	125	7,5	1,2
220	355	125	8	1,2
254	355	125	8	0,9
305	355	125	8	0,9
355	355	125	8	0,9
406	355	125	8	0,9
508	470	182,5	8	0,9

Tubi Flessibili S.r.l. - Tel: +39 0131238971 - Email: info@tubiflessibili.net

According to ISO 1307

Above technical data are referring to applications at a room temperature (+20°C)

Copyright © TUBI FLESSIBILI S.r.l. - All rights reserved. The texts and images are property of Tubi Flessibili S.r.l. Even partial reproduction of the catalog is prohibited.

