


TUBOSIL - POLI

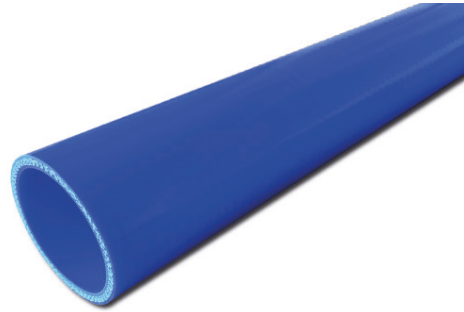

STRUCTURE

Straight hoses made of VMQ (Vinyl Methyl Quality) silicone, with polyester reinforcement. Can be supplied with Fluorosilicone (FVMQ) inner layer

APPLICATION








Cooling systems for passenger cars, motorbikes, excavators, industrial vehicles, busses and general industrial systems. Turbo-charger and intercooler systems

TEMPERATURE RANGE

-55 °C / +180 °C with peaks to + 200 °C

COLOUR

Blue, other on request

|  Inner diameter (mm) |  Wall thickness (mm) |  Reinforcement number |  Wall thickness tolerance (mm) |  Burst pressure (bar) |  Hardness (Shore A) |  Length (mm) |
|---|---|--|---|---|--|---|
| 6,5 | 4,0 | 3 | +1 / -0,5 | 45 | 65 - 75 | 1000 - 4000 |
| 8 | 4,0 | 3 | +1 / -0,5 | 45 | 65 - 75 | 1000 - 4000 |
| 9,5 | 4,0 | 3 | +1 / -0,5 | 35 | 65 - 75 | 1000 - 4000 |
| 11 | 4,0 | 3 | +1 / -0,5 | 35 | 65 - 75 | 1000 - 4000 |
| 13 | 4,0 | 3 | +1 / -0,5 | 35 | 65 - 75 | 1000 - 4000 |
| 16 | 4,0 | 3 | +1 / -0,5 | 30 | 65 - 75 | 1000 - 4000 |
| 19 | 4,0 | 3 | +1 / -0,5 | 28 | 65 - 75 | 1000 - 4000 |
| 22 | 4,0 | 3 | +1 / -0,5 | 19,3 | 65 - 75 | 1000 - 4000 |
| 25 | 4,0 | 3 | +1 / -0,5 | 19,3 | 65 - 75 | 1000 - 4000 |
| 28 | 4,5 | 3 | +1 / -0,5 | 19,3 | 65 - 75 | 1000 - 4000 |
| 30 | 4,5 | 3 | +1 / -0,5 | 15,4 | 65 - 75 | 1000 - 4000 |
| 32 | 4,5 | 3 | +1 / -0,5 | 15,4 | 65 - 75 | 1000 - 4000 |

Tubi Flessibili S.r.l. - Tel: +39 0131238971 - Email: info@tubiflessibili.net

According to ISO 1307








Above technical data are referring to applications at a room temperature (+20°C)

Copyright © TUBI FLESSIBILI S.r.l. - All rights reserved. The texts and images are property of Tubi Flessibili S.r.l. Even partial reproduction of the catalog is prohibited.





TUBIFLESSIBILI

|  Inner diameter (mm) |  Wall thickness (mm) |  Reinforcement number |  Wall thickness tolerance (mm) |  Burst pressure (bar) |  Hardness (Shore A) |  Length (mm) |
|---|---|--|---|---|--|---|
| 35 | 4,5 | 3 | +1 / -0,5 | 15,4 | 65 - 75 | 1000 - 4000 |
| 38 | 4,5 | 3 | +1 / -0,5 | 15,4 | 65 - 75 | 1000 - 4000 |
| 40 | 4,5 | 3 | +1 / -0,5 | 15,4 | 65 - 75 | 1000 - 4000 |
| 45 | 4,5 | 3 | +1 / -0,5 | 14 | 65 - 75 | 1000 - 4000 |
| 48 | 4,5 | 3 | +1 / -0,5 | 14 | 65 - 75 | 1000 - 4000 |
| 51 | 5,0 | 4 | +1 / -0,5 | 14 | 65 - 75 | 1000 - 4000 |
| 53 | 5,0 | 4 | +1 / -0,5 | 14 | 65 - 75 | 1000 - 4000 |
| 55 | 5,0 | 4 | +1 / -0,5 | 13 | 65 - 75 | 1000 - 4000 |
| 57 | 5,0 | 4 | +1 / -0,5 | 12 | 65 - 75 | 1000 - 4000 |
| 60 | 5,0 | 4 | +1 / -0,5 | 10 | 65 - 75 | 1000 - 4000 |
| 63 | 5,0 | 4 | +1 / -0,5 | 10 | 65 - 75 | 1000 - 4000 |
| 65 | 5,0 | 4 | +1 / -0,5 | 10 | 65 - 75 | 1000 - 4000 |
| 68 | 5,0 | 4 | +1 / -0,5 | 8 | 65 - 75 | 1000 - 4000 |
| 70 | 5,0 | 4 | +1 / -0,5 | 8 | 65 - 75 | 1000 - 4000 |
| 76 | 5,5 | 5 | +1 / -0,5 | 8 | 65 - 75 | 1000 - 4000 |
| 80 | 5,5 | 5 | +1 / -0,5 | 8 | 65 - 75 | 1000 - 4000 |
| 83 | 5,5 | 5 | +1 / -0,5 | 5,5 | 65 - 75 | 1000 - 4000 |
| 90 | 5,5 | 5 | +1 / -0,5 | 5,5 | 65 - 75 | 1000 - 4000 |
| 102 | 5,5 | 5 | +1 / -0,5 | 5 | 65 - 75 | 1000 - 4000 |
| 114 | 5,5 | 5 | +1 / -0,5 | 5 | 65 - 75 | 1000 - 4000 |
| 127 | 5,5 | 5 | +1 / -0,5 | 5 | 65 - 75 | 1000 - 4000 |
| 152 | 5,5 | 5 | +1 / -0,5 | 5 | 65 - 75 | 1000 - 4000 |

Tubi Flessibili S.r.l. - Tel: +39 0131238971 - Email: info@tubiflessibili.net

According to ISO 1307

Above technical data are referring to applications at a room temperature (+20°C)

Copyright © TUBI FLESSIBILI S.r.l. - All rights reserved. The texts and images are property of Tubi Flessibili S.r.l.
Even partial reproduction of the catalog is prohibited.

